

MDG35PN

MAYTAG® COMMERCIAL
ENERGY ADVANTAGE™
MULTI-LOAD DRYER



LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half-century.

ENERGY-SAVING SOLUTIONS

Maytag built the first appliance ever to receive the ENERGY STAR® label. Today, we offer energy-saving laundry solutions for all commercial laundry needs—from highly efficient ENERGY STAR®-qualified washers to the most energy-efficient dryers ever from Maytag—to help you save money and build profits.

MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperature and cool-down. Then select the cycle with the simple touch of a button.

CAPACITY:

- 35-Lb. Capacity

FOR YOUR CUSTOMERS:

- Extra-Large Door Opening With Dual-Pane Door Glass
- Time Remaining Digital Display
- Self-Diagnostic Microprocessor Controls

FOR YOUR OPERATION:

- Owner-Programmable Single-Phase Reversing Cylinder
- Low BTU and Fast Dry
- Enhanced Insulation For Greater Efficiency
- Front Serviceable
- Large-Capacity Lint Drawer

BUILT-TO-LAST™ FEATURES:

- Dual Fire Suppression Systems
 - Waterless System
 - Wet System Option
- Heavy-Duty Motors
- Permanently Lubricated Bearings
- Four-Point Roller Support System
- 3-Year Limited Warranty—All Parts Covered

LAUNDRY SOLUTIONS
YOU CAN *DEPEND* ON.

visit maytagcommerciallaundry.com
or call 800-662-3587



OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.






MDG35PN

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ MULTI-LOAD DRYER

Maytag® Commercial Energy Advantage™ Multi-Load Dryer

MICROPROCESSOR NON-COIN

DRYER SPECIFICATIONS	
MODEL	MDG35PN
CAPACITY	
Lbs. (kg)	35 (15.88)
Cu. ft. (cu. m)	12.27 (.347)
TUMBLER	
Diameter—in. (mm)	30 (762)
Depth—in. (mm)	30 (762)
MOTOR	
Single-phase, thermoprotected against overload, auto-reset	✓
HP (kw) tumbler/blower	.25 (.19)/.50 (.37)
Tumble speed—RPM	40 ± 1.5
AIRFLOW	
Cfm (cmm)	319 (9.03)
GAS RATING	
BTU/hr. (kcal/hr.)	64,000 (16,128)
GAS INLET	
M.N.P.T. in. (mm)	1 inlet, 0.50 (12.7)
ELECTRICAL REQUIREMENTS	
Volts (Hz)	120(60)
Amps	15
Export Models—options available	220–480V/50–60Hz/1PH or 3PH
COLOR	
White	✓
Stainless Steel	✓
APPROXIMATE WEIGHT	
Crated—lbs. (kg)	492 (223)
Uncrated—lbs. (kg)	462 (209)
DIMENSIONS	
Height—in. (mm)	67 (1,702)
Width—in. (mm)	31.12 (791)
Depth not including door handle—in. (mm)	40.43 (1,027)
Exhaust duct diameter—in. (mm)	6 (152)
Door diameter opening—in. (mm)	19.38 (492)
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.	

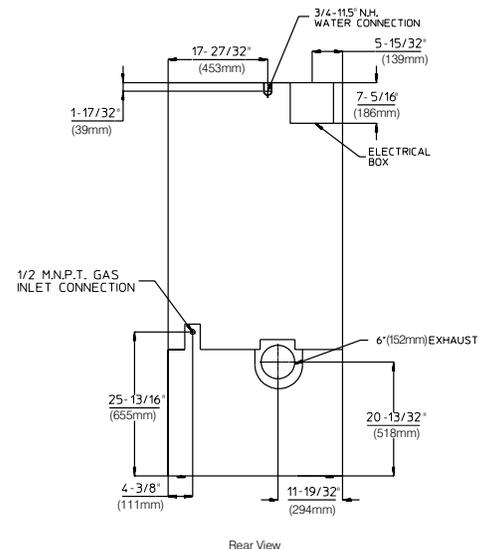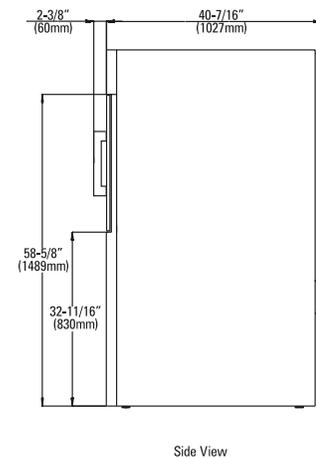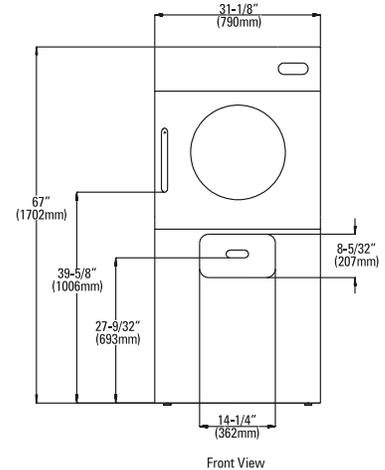

MAYTAG® LIMITED WARRANTY 3 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.